DSM430 Document Print Control Maintenance

Overview The Document Print Control Program has been designed in conjunction with the

Document Print Control Output Program, to provide greater flexibility in directing preprinted stationery. Calling parameter definitions are set up by document type, which define the systems printing rules. These calling parameters are used by the Batch Document Print Program when a print run for a specific document type is generated.

Purpose This panel allows you to:

Add a Document Print Control – Calling Parameter Definition

Maintain Document Print Control
Copy Document Print Control
Delete Document Print Control

Examples

This section illustrates examples concerning:

Example 1: Add a Document Print Control - Calling Parameter Definition

Example 2: Maintain Document Print Control

Example 3: Copy Document Print Control


Example 4: Delete Document Print Control

Example 1: Add a Document Print Control – Calling Parameter Definition


This example describes how to add a document print control – calling parameter definition.

 Select menu option Document Print Control from Base Modules>Distribution>Other>Document Printing>Print Management menu.

DSM430A Work with Document Print Control panels is displayed.

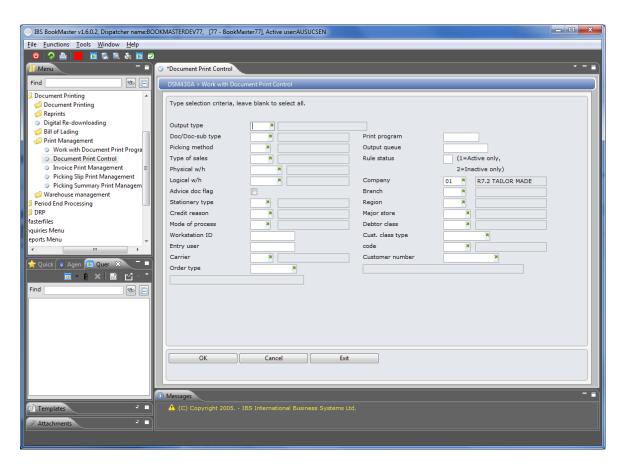

2. Specify selection criteria or leave blank to select all and click OK.

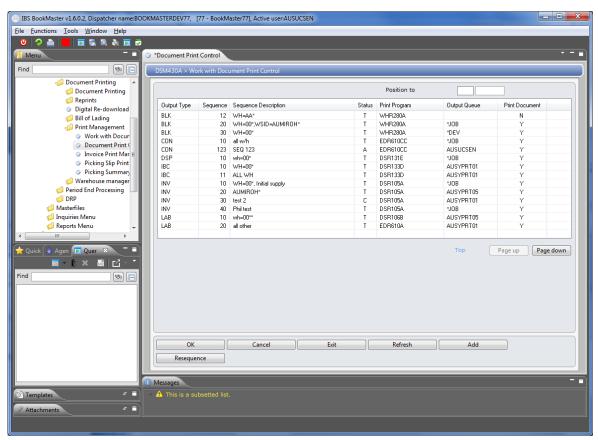

Options

Detail Access Document Print Control Maintenance in change mode to

change the details regarding document printing.

Copy Access Document Print Control Maintenance in copy mode to

copy the existing details regarding document printing to new

one.

Delete Access Document Print Control Maintenance in delete mode to

delete the details regarding document printing of selected

record.


Functions

Add Access Document Print Control Maintenance in add mode to

add the details regarding document printing.

3. Click Add.

DSM430 Document Print Control Maintenance panel is displayed in add mode.

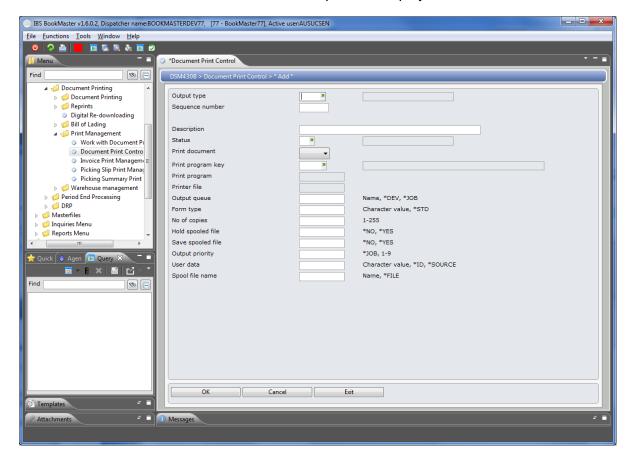

Relevant Fields

Output Type The output type indicates the type of document that is to print,

which influences the printer requirements. The possible output

types are defined in TMSDS/PRT-OUTT control file.

Sequence Number Specify a unique sequence number for the document print control rule.

Description Enter a description for the print control rule.

Status Specify the status for the document print control rule. The

statuses are set up in TMSDS/DP-STS control file.

Print Indicate whether to print advices if the definition instructs the

document system to search for advices.

Printer File Identify the program to be printed and the printer file.

Output Queue Specify the output queue to which to direct the printing.

Form Type The form type identifies the type of form to be printed, for

example, could specify an invoice or credit form.

No of Copies Enter the number of copies to print.

Hold Spooled To override the default, select either

d To override the default, select either *NO or *YES to determine whether to place the document on hold in your spool file so that

it does not print immediately.

Save Spooled Select either *NO or *YES to determine whether to save the

document after printing.

Output Priority The output priority gives the document a sequence number

ranging from 1 - 9, 1 = highest priority and 9 = lowest priority. Documents will be printed in order of priority according to the

output priority sequence allocated.

User Data Enter text which to identify this document in your spool file. An

entry of '*ID* causes invoice and picking slip programs to insert information into the User data field of your spool file to identify

the document being printed.

Spool File This is the name of the spool file that documents are to be


Name directed to.

4. Select OK.

File

File

DSM430B Document Print Control panel is displayed in add mode.

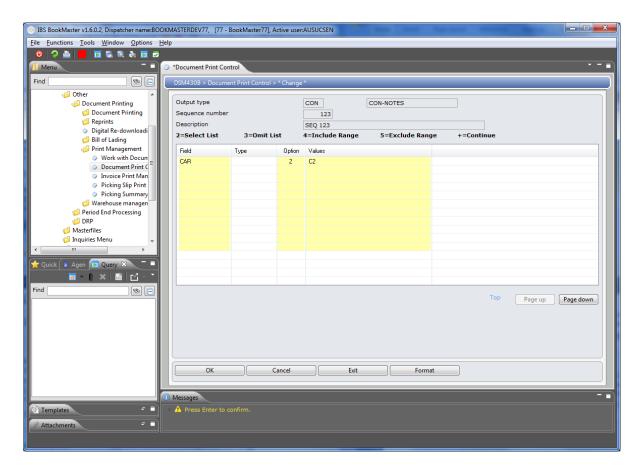

Relevant Fields

Field Select a field from the available list of fields. ption. Click OK.

(DSM033 Discount Rule Maintenance - Add)

Option Specify the option to be applied on the field as a list to

include/omit or as a range of values to be included/ excluded.

The list can be continued over several lines by using the

Continue option.

Values Specify the values or range of values for the field depending on

the option specified.

5. Key in required fields and click OK.

Addition process is completed.

Example 2: Maintain Document Print Control

This example describes how to maintain document print control.

- Repeat step 1 as in <u>Example 1: Add a Document Print Control Calling Parameter</u> <u>Definition</u>
- 2. Select a record and click **Detail**.

DSM430 Document Print Control Maintenance panel is displayed in Change mode.

3. Make required changes and click **OK**.

Example 3: Copy Document Print Control

This example describes how to copy existing document print control.

- 1. Repeat step 1 as in Example 1: Add a Document Print Control Calling Parameter Definition
- 2. Select a record and click Copy.

DSM430 Document Print Control Maintenance panel is displayed in Copy mode.

3. Key in required fields and click **OK**.

Existing record is copied in to a new record.

Example 4: Delete Document Print Control

This example describes how to delete selected document print control.

- 1. Repeat step 1 as in Example 1: Add a Document Print Control Calling Parameter Definition
- 2. Select a record and click **Delete**.

DSM430 Document Print Control Maintenance panel is displayed in Delete mode.

Click OK to confirm deletion.

Record is deleted.